



uni_one TERMOSCUDO

TRIPLE GLAZING **U_w=0,7 W/m²K**



Material		Wood-Aluminium
----------	---	----------------

Thermal insulation		U _w = 0,7 W/m²K		U _w = 0,95 W/m²K
Insulating glass		Triple glazing thickness 54mm		Triple glazing thickness 52mm

Acoustic insulation		Not declared
---------------------	---	--------------


Security hardware		Up to RC2
-------------------	---	-----------

Dimensions in mm.	
Thickness of sash	111,5 x 70mm
Thickness of frame	108,5 x 73mm
Visible section sash + frame	106mm
Visible section middle clamp	145,5mm

Air permeability		CLASS 4
Water tightness		CLASS E1200
Wind load resistance		CLASS C5

	PASSIVE HOUSE INSTITUTE CERTIFICATION: WARM, TEMPERATE CLIMATE Component-ID: 0992wi04 Passive House Institute Dr. Wolfgang Feist, 64283 Darmstadt, Germany
---	---

The thermal transmittance values are certified according to UNI EN 10077/1-2018, UNI EN 10077/2-2018, UNI EN 10456-2008, UNI EN 673-2011 standards, in reference to a window with 1 sash WxH (1230x1480mm, $\psi_g = 0,04$ W/mK)
The air-water-wind tightness performances are certified in reference to a window with 2 sashes WxH (1230x1480mm)

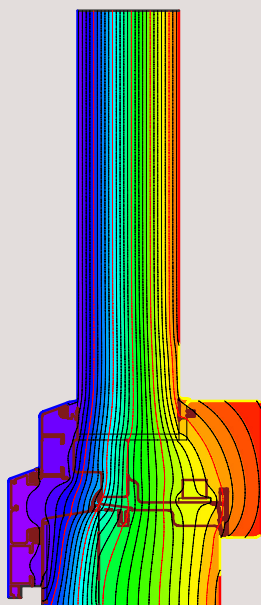

TERMOSCUDO - 52-54mm glass SOFT WOOD U_f = 0,82 W/m²K

U _g W/m²K		U _w W/m²K
0,5	->	0,7
0,6	->	0,8
0,7	->	0,8
0,8	->	0,9
0,9	->	1,0
1,0	->	1,0
1,1	->	1,1